




**Item#: NV3004**

**Features**

- Ready to install 24V DC kit with plug and play connection
- Available in Single Color, Tunable CCT, RGB, and RGB+WW kits
- Each tape light kit has a maximum run of 16.4 feet
- Wireless remote features brightness and color adjustment settings
- Receiver will remember last setting applied when powering on/off
- cULus Listed (dry location)

**Available CCT**

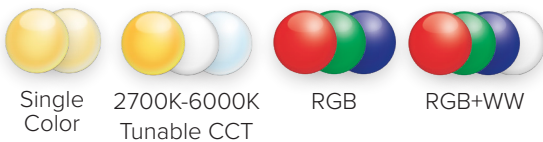

**Control Options**

- Trulux Kit Handheld Remote  
- Kits include (1) Radio Frequency handheld remote and (1) in-line RF receiver

**Listing / Ratings**



**TRULUX™ Tape Light Kits**

Trulux tape light kits come with everything you need to create linear lighting effects in your home or commercial property. No more piecing together a system or calculating wattage loads because each kit comes standard with hand-held remote, driver, receiver, connectors, and tape light.

**Technical Information**

Series	STL / HTL / HTL-TW / HTL-RGB / HTL-RGBW
Input Voltage	24V DC
CCT	2700K / 3000K / 2700K-6000K / RGB / RGBW
CRI	90+
Wattage	2.7W/ft (STL) / 4.6W/ft (HTL) / 2.9W/ft (TW) / 4.6W/ft (RGB/RGBW)
Lumens	See individual product
Max Run	16.4 feet*
Cutttable	Every 6.56" (STL) / 3.94" (HTL)
IP Rating	IP54 (unjacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

\* 24V DC Plug-in power supply provided with each kit is rated for 16.4 feet maximum run of tape light only (2A for STL type and 3A for HTL types).

**Trulux™ Kit Contents:**

- (1) 16.4ft (5m) Reel of Trulux® IP54 (unjacketed) tape light
- (1) Inline LED Controller/Receiver
- (1) Radio Frequency Remote Control
- (1) 24V DC Power Supply (2A for STL and 3A for HTL)
- (1) 15ft Reel of wire (22AWG for Single Color & 20AWG for TW/RGB/RGBW)
- (3) Tape-to-Tape snap connectors
- (6) Tape-to-Wire snap connectors